




configuration 1




configuration 2




configuration 1




configuration 2

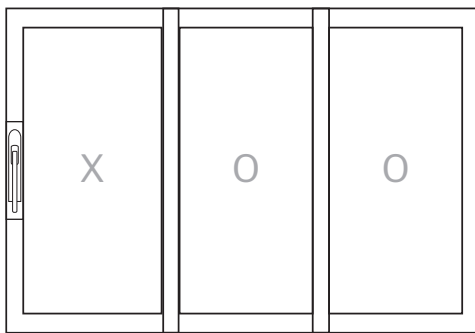


configuration 1

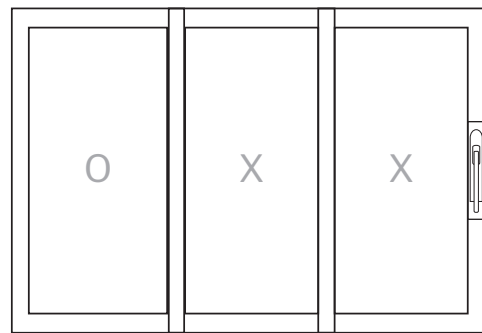


configuration 2

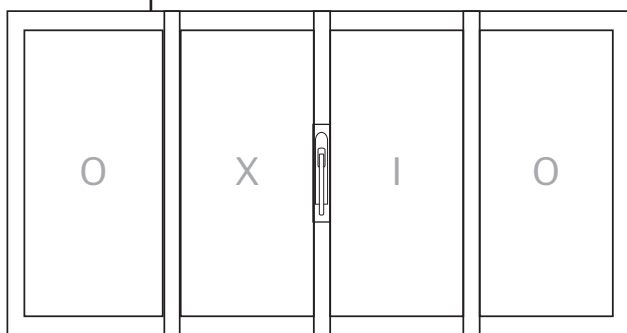

configuration 1

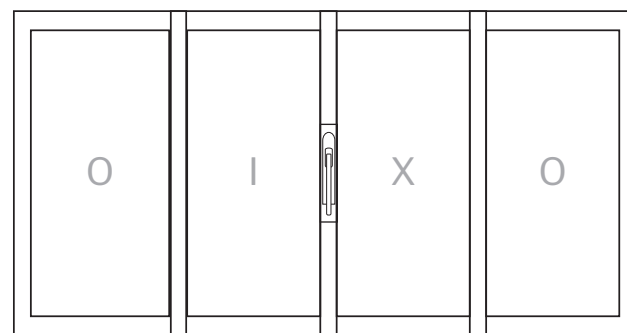

configuration 2

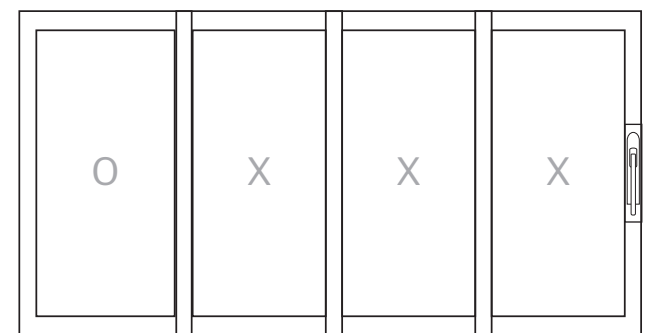


configuration 3


O = close/fixed
X = open/sliding

SL550 - all measurements are listed in millimeters


CONFIGURATION	MIN SASH WIDTH	MAX SASH WIDTH	MIN SASH HEIGHT	MAX SASH HEIGHT
O	1900	2500	2133	3048
OX - XO	1900	2500	2133	3048
XOO - OOX	1900	2500	2133	3048
OXIO - OIXO - OXXX	1900	2500	2133	3048




configuration 1




configuration 2




configuration 1




configuration 2

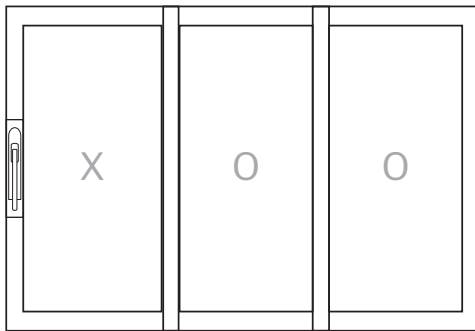


configuration 1

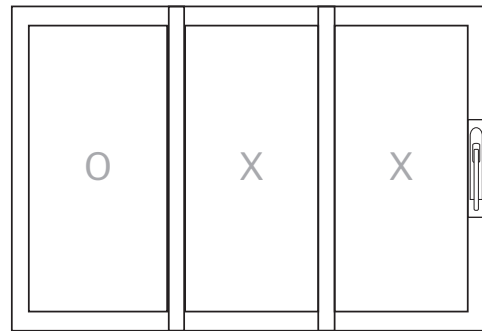


configuration 2

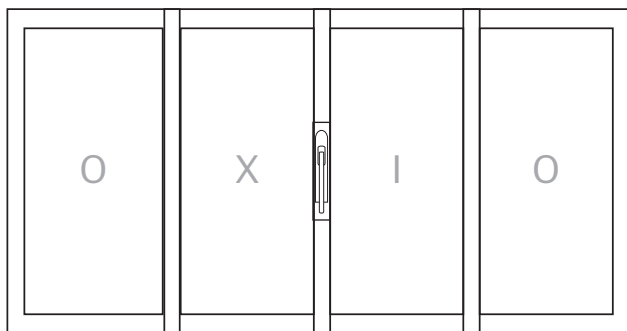

configuration 1

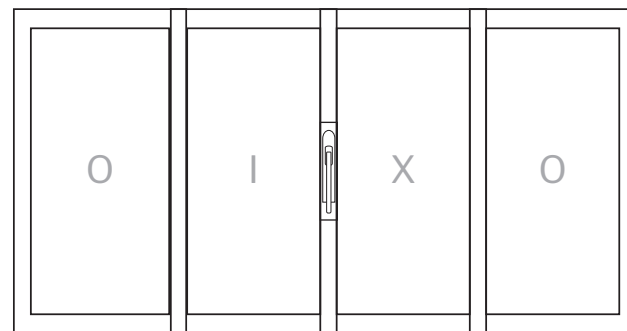

configuration 2

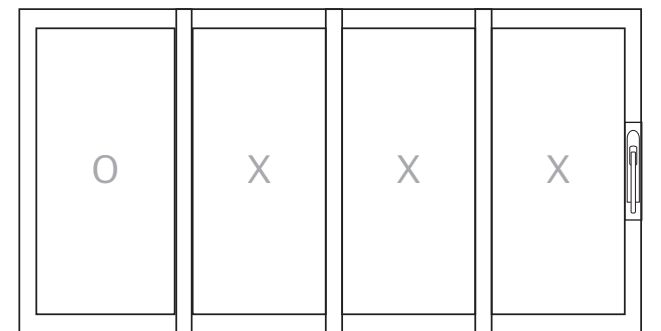

configuration 3

O = fixe
X = coulissante

SL550 - toutes les mesures sont spécifiés en millimètres

CONFIGURATION	LARGEUR VOLET MIN	LARGEUR VOLET MAX	HAUTEUR VOLET MIN	HAUTEUR VOLET MAX
O	1900	2500	2133	3048
OX - XO	1900	2500	2133	3048
XOO - OOX	1900	2500	2133	3048
OXIO - OIXO - OXXX	1900	2500	2133	3048